


CHOPOK (KAZETA, EKO) 2R90-S/330,450 LD2


CHOPOK (KAZETA, EKO) R90-S/330,450 LD2

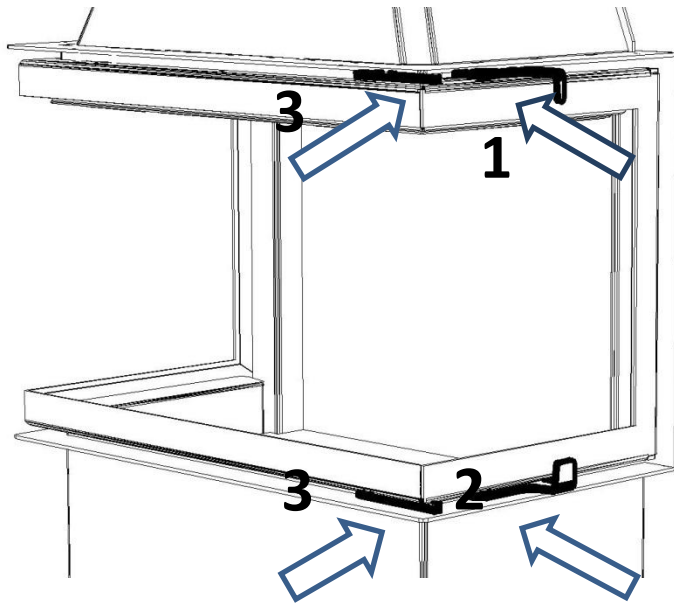

Opening elements of the door:

- 1 upper locking lever
- 2 bottom opening lever
- 3 locking levers

Keep the opening order according to this manual!

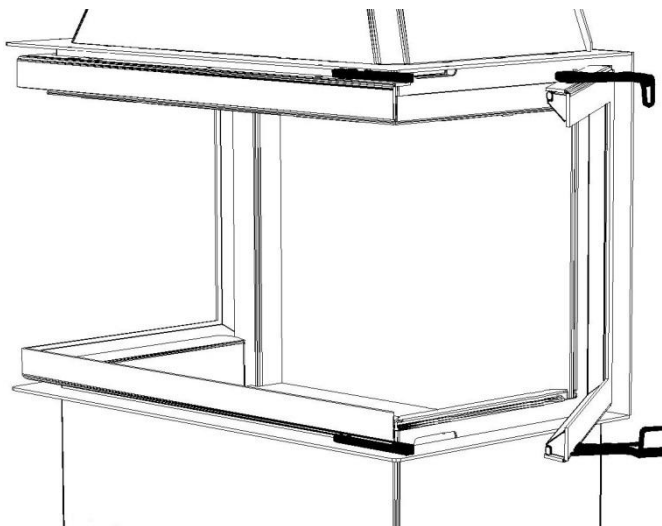


Operation - firing:

a – unlock 1

b – open 2

Joint of the glasses will release and door can be opened to the side by pulling for the bottom lever.

Note: In your order you can specify, which door will be used as a firing/stoking door. Front door or side door. Side door left or right. Firing door has an extended lever. When opening in reverse order, seals may be damaged.

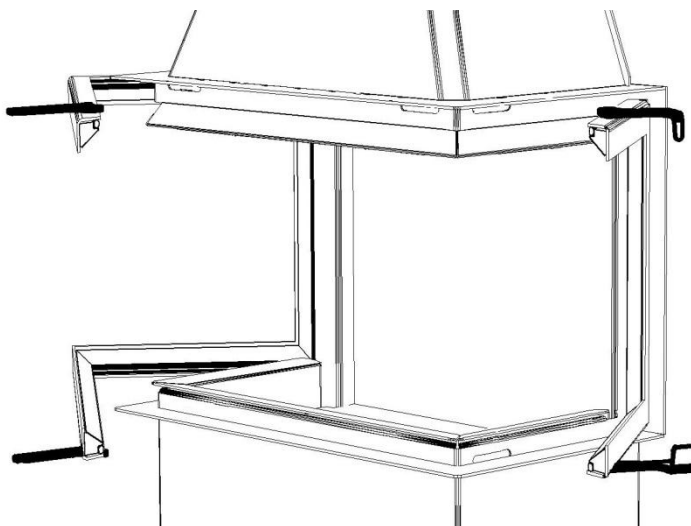

Service – cleaning glasses:

a – open firing door according instruction „firing“

b – rotate levers 3 until stop


c – clean glasses according instruction „maintenance“

The join of the glass will release, the glass can be turned in the hinges.

When opening and close, hold the bottom lever. When closing lift up slightly.

CHOPOK (KAZETA, EKO) 2R90-S/330,450 LD2


CHOPOK (KAZETA, EKO) R90-S/330,450 LD2

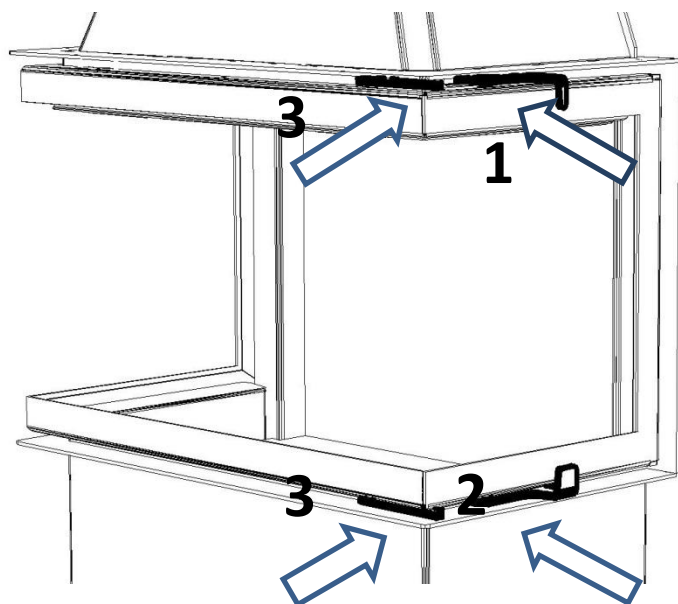

Opening elements of the door:

- 1 upper locking lever
- 2 bottom opening lever
- 3 locking levers

Keep the opening order according to this manual!

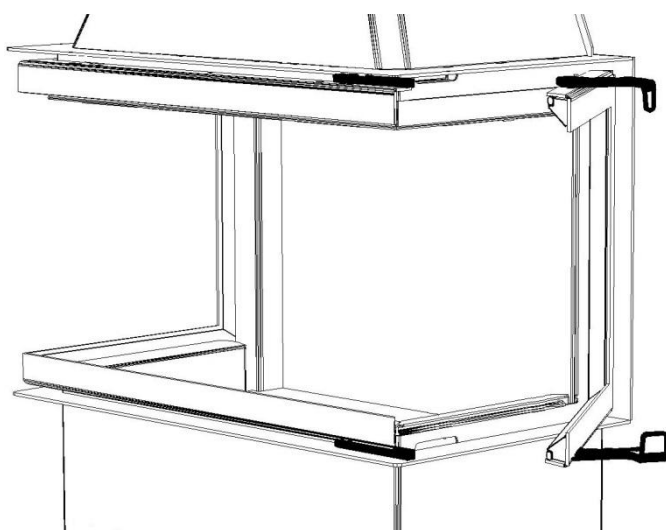


Operation - firing:

- a – unlock 1
- b – open 2

Joint of the glasses will release and door can be opened to the side by pulling for the bottom lever.

Note: In your order you can specify, which door will be used as a firing/stoking door. Front door or side door. Side door left or right. Firing door has an extended lever. When opening in reverse order, seals may be damaged.

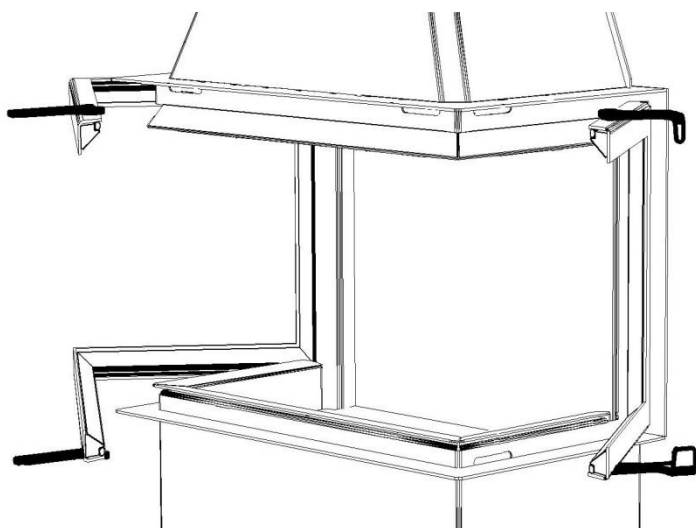


Service – cleaning glasses:

- a – open firing door according instruction „firing“
- b – rotate levers 3 until stop
- c – clean glasses according instruction „maintenance“


The join of the glass will release, the glass can be turned in the hinges. When opening and close, hold the bottom lever. When closing lift up slightly.

CHOPOK (KAZETA, EKO) 2R90-S/380,500 VD

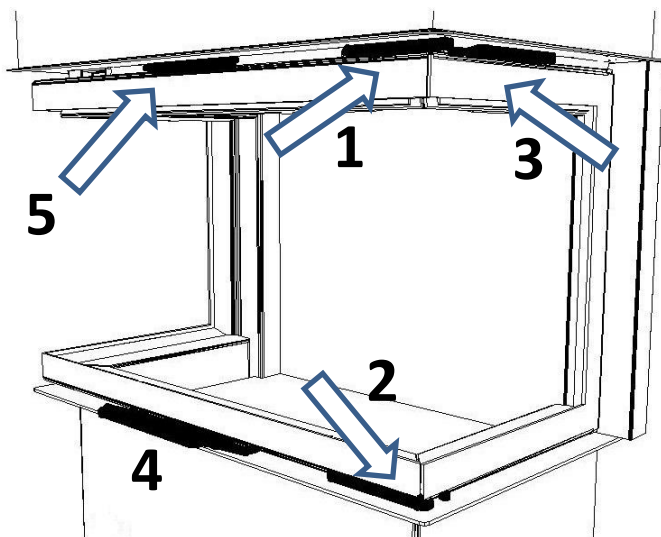


Opening elements of the door:

- 1 upper locking lever
- 2 bottom locking lever
- 3 side locking lever
- 4 handle (MO1) or MP2
- 5 lock door

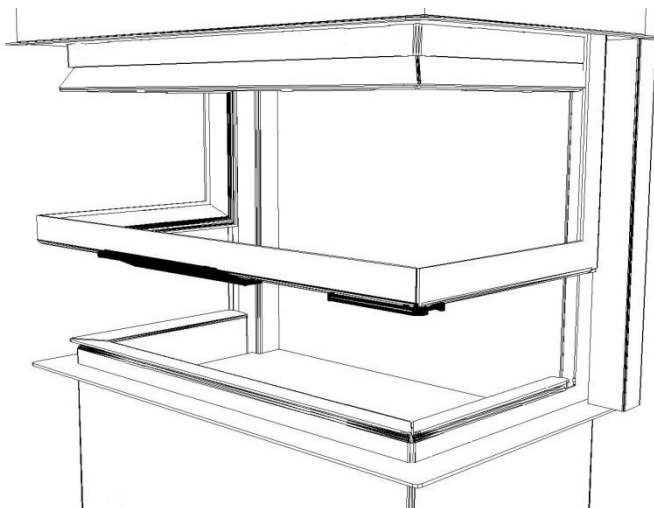

Operation - firing:

Lift-up the door using MO1 or MP2

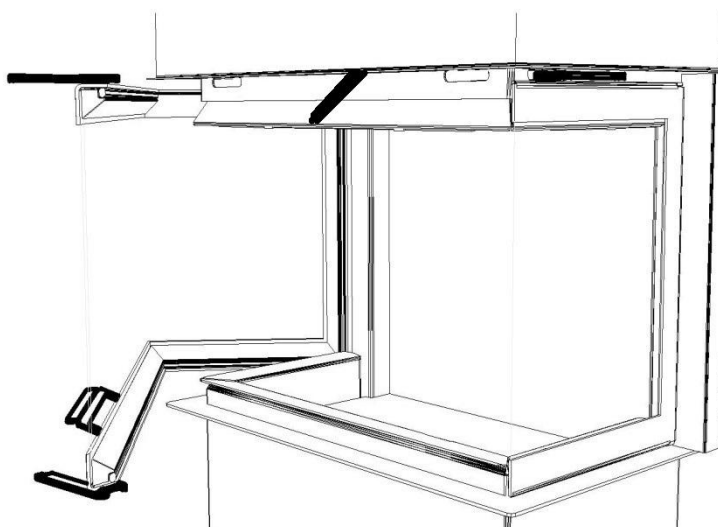

Service – cleaning glasses:

- a – lock door
- b – unlock 1
- c – open 2
- d – clean glasses according instruction „maintenance“

The join of the glass will release, the glass can be turned in the hinges.

When opening and close, hold the bottom lever. When closing lift up slightly.

Note: 1. Using the lever 3, the 3rd glass can also be opened.

2. You can find lever 5 once in the front or twice on the sides.