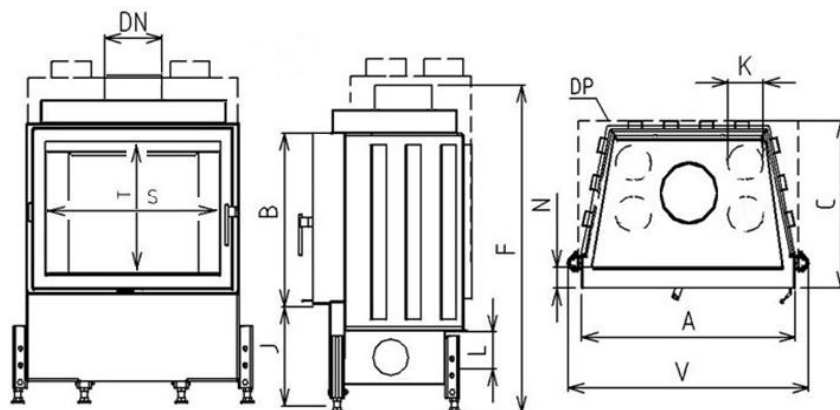
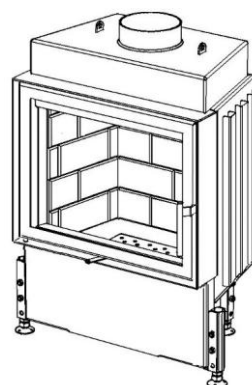


Model: **L LD**

Typ according to the EN16510-1:2023:

CM
A


Sizes			KAZETA 60 L LD 600/450	KAZETA 60 L LD 600/510
1	A	mm	600	
2	F	mm	960	1020
3	C	mm	470	
4	DN	Ø mm	180	
5	B	mm	450	510
6	V	mm	710	
7	R	mm		
8	FF	mm		
9	H	mm		
10	J	mm	325+(160)	
11	K	Ø mm	4x125	
12	L	Ø mm	125	
13	M	mm		
14	N	mm	50	
15	S	mm	480	
16	T	mm	330	390
17	U	mm		


Basic design :

External air inlet (EPV)
 Segment chamotte lining (SO)
 Glass classic
 Desing inox/black RP2,RP1,R, strips SM
 Coated with ecological paint

Optional accessories:


Cover frame (KR)
 Black segment chamotte lining (SOČ)
 Glass Reflex (SR)
 Glass modern (SM)
 External ashtray (VOP)
 Convectional casing (DP)
 Lower hearth (ZO)
 Rear feeding door (PD)
 Vertical heat-storing panel (AZ)
 Heat accumulation quadrant (APO)

Test Method: EN16510-1 ed. 2.2023

The roomheater complies with the requirements: EN 16510-2-2:2022, DIN +, BlmSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesig

The minimum distances from the combustible materials:

A

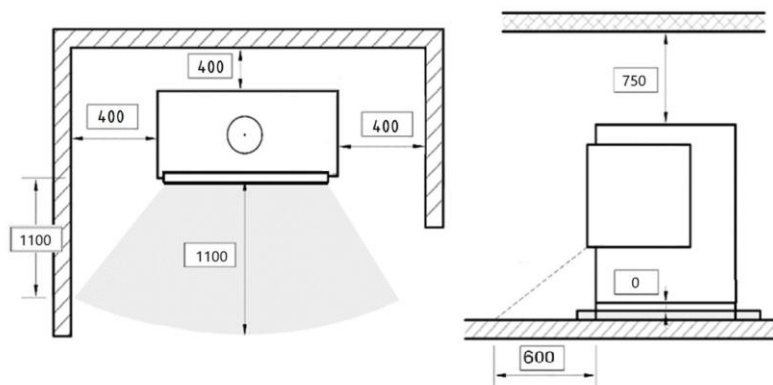


Minimum distances to non-combustible walls	100 mm
Thickness of protective insulation	50 mm
Protective insulation material	calcium silicate


Technical parameters			
1	Nominal heat output	kW	6
2	Heat flow into the space	kW	6
3	Pressure required	Pa	12
4	Average efficiency	%	77,6
5	Seasonal space heating efficiency	%	68
6	Energy efficiency index	—	103
7	Consumption of electrical energy	kW/h	0
8	Continuous (CON) or intermittent (INT) operation		INT
9	Average flue gas temperature	°C	252
10	Wood consuption	kg/h	2
11	Consumption of combustion air	m ³ /h	18
12	Standing air loss	m ³ /h	1,9
13	Mass of the appliance	kg	185
14	CO ₂	%	NPD
15	Flue gas mass flow	g/s	6,4
16	CO emission at 13 Vol % O ₂	mg/m ³	1211
17	NOX emission at 13 Vol % O ₂	mg/m ³	131
18	OGC emission at 13 Vol % O ₂	mg/m ³	103
19	Dust emission at 13 Vol % O ₂	mg/m ³	31
20	Minimum building space	length	mm 1010
		width	mm 620
		height	mm 1170
21	Chimney designation		T400
22	Connection to a common chimney		no
23	Maximum load of a chimney the appliance may carry	kg	130
24	Three-component insulated chimney - active height 4,5m	Ø mm	160
25	Character of building construction with fireplace insert	warm air convection	yes
		heat storage without conv	yes
26	Convection hot air flow (min. clean cross-section input)	cm ²	200
27	Convection hot air flow (min. clean cross-section output)	cm ²	300

Model: **L LD**

Typ according to the EN16510-1:2023:

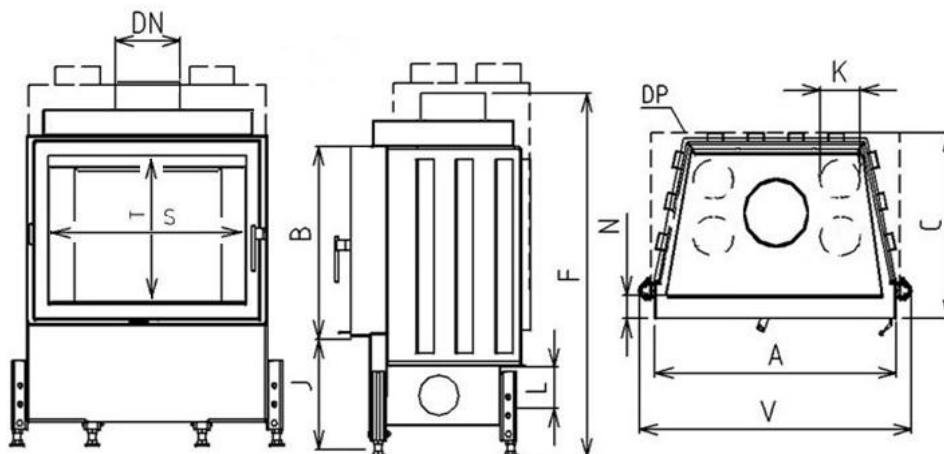CM
A


Sizes			KAZETA 67 L LD 670/450	KAZETA 67 L LD 670/510
1	A	mm	670	
2	F	mm	960	1020
3	C	mm	470	
4	DN	Ø mm	180	
5	B	mm	450	510
6	V	mm	780	
7	R	mm		
8	FF	mm		
9	H	mm		
10	J	mm	325+(160)	
11	K	Ø mm	4x125	
12	L	Ø mm	125	
13	M	mm		
14	N	mm	50	
15	S	mm	550	
16	T	mm	330	390
17	U	mm		

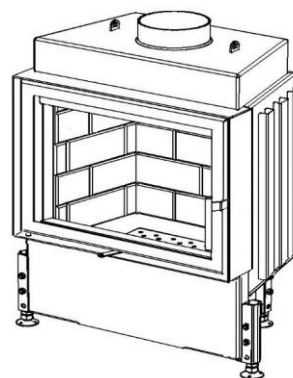
Basic design :

External air inlet (EPV)
 Segment chamotte lining (SO)
 Glass classic
 Desing inox/black RP2,RP1,R, strips SM
 Coated with ecological paint


Optional accessories:

Cover frame (KR)
 Black segment chamotte lining (SOČ)
 Glass Reflex (SR)
 Glass modern (SM)
 External ashtray (VOP)
 Convectional casing (DP)
 Lower hearth (ZO)
 Rear feeding door (PD)
 Vertical heat-storing panel (AZ)
 Heat accumulation quadrant (APO)

Test Method: EN16510-1 ed. 2.2023

The roomheater complies with the requirements: EN 16510-2-2:2022, DIN +, BlmSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185 Ecodesig

The minimum distances from the combustible materials:

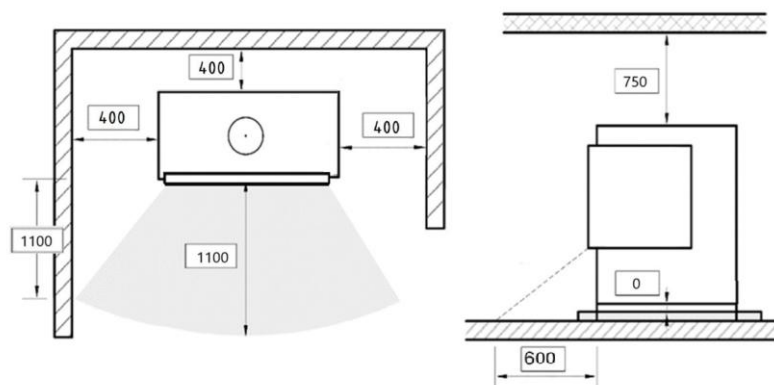


Minimum distances to non-combustible walls	100 mm
Thickness of protective insulation	50 mm
Protective insulation material	calcium silicate


Technical parameters			
1	Nominal heat output	kW	6,5
2	Heat flow into the space	kW	6,5
3	Pressure required	Pa	12
4	Average efficiency	%	77,6
5	Seasonal space heating efficiency	%	68
6	Energy efficiency index	—	103
7	Consumption of electrical energy	kW/h	0
8	Continuous (CON) or intermittent (INT) operation		INT
9	Average flue gas temperature	°C	252
10	Wood consuption	kg/h	2,1
11	Consumption of combustion air	m ³ /h	19,5
12	Standing air loss	m ³ /h	1,8
13	Mass of the appliance	kg	215
14	CO ₂	%	NPD
15	Flue gas mass flow	g/s	7,2
16	CO emission at 13 Vol % O ₂	mg/m ³	1226
17	NOX emission at 13 Vol % O ₂	mg/m ³	131
18	OGC emission at 13 Vol % O ₂	mg/m ³	111
19	Dust emission at 13 Vol % O ₂	mg/m ³	32
20	Minimum building space	length	mm 1080
		width	mm 620
		height	mm 1170
21	Chimney designation		T400
22	Connection to a common chimney		no
23	Maximum load of a chimney the appliance may carry	kg	130
24	Three-component insulated chimney - active height 5 m	Ø mm	180
25	Character of building construction with fireplace insert	warm air convection	yes
		heat storage without conv	yes
26	Convection hot air flow (min. clean cross-section input)	cm ²	200
27	Convection hot air flow (min. clean cross-section output)	cm ²	325

Model: **L LD**

Typ according to the EN16510-1:2023:

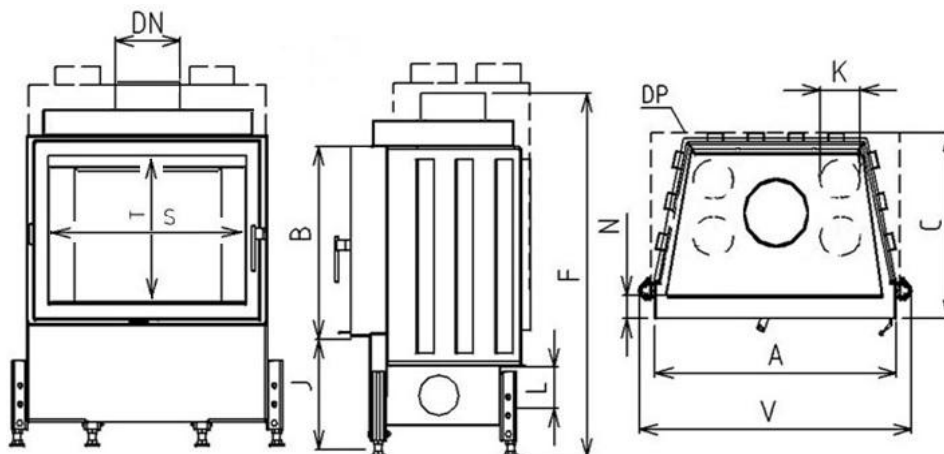CM
A


Sizes			KAZETA 73 L LD 730/450	KAZETA 73 L LD 730/510
1	A	mm	730	
2	F	mm	960	1020
3	C	mm	470	
4	DN	Ø mm	180	
5	B	mm	450	510
6	V	mm	840	
7	R	mm		
8	FF	mm		
9	H	mm		
10	J	mm	325+(160)	
11	K	Ø mm	4x125	
12	L	Ø mm	125	
13	M	mm		
14	N	mm	50	
15	S	mm	610	
16	T	mm	330	390
17	U	mm		

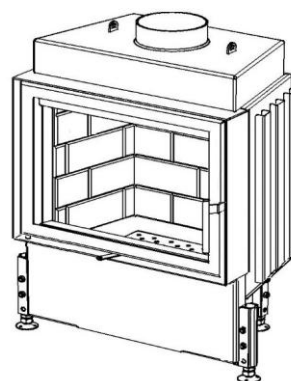
Basic design :

External air inlet (EPV)
 Segment chamotte lining (SO)
 Glass classic
 Desing inox/black RP2,RP1,R, strips SM
 Coated with ecological paint

Optional accessories:


Cover frame (KR)
 Black segment chamotte lining (SOČ)
 Glass Reflex (SR)
 Glass modern (SM)
 External ashtray (VOP)
 Convectional casing (DP)
 Lower hearth (ZO)
 Rear feeding door (PD)
 Vertical heat-storing panel (AZ)
 Heat accumulation quadrant (APO)

Test Method: EN16510-1 ed. 2.2023

The roomheater complies with the requirements: EN 16510-2-2:2022, DIN +, BlmSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185 Ecodesig

The minimum distances from the combustible materials:

A

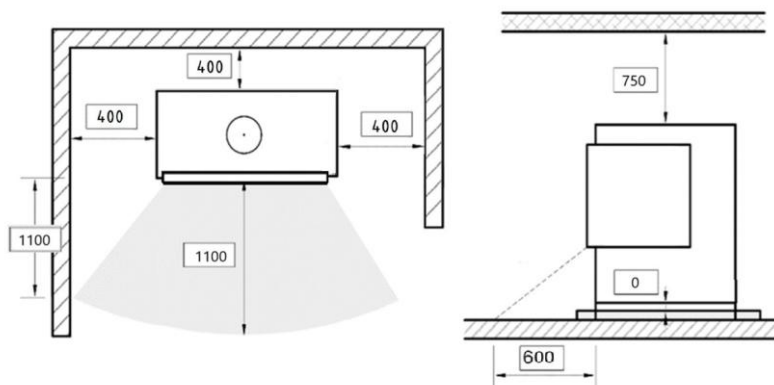

Minimum distances to non-combustible walls	100 mm
Thickness of protective insulation	50 mm
Protective insulation material	calcium silicate


Technical parameters			
1	Nominal heat output	kW	6,5
2	Heat flow into the space	kW	6,5
3	Pressure required	Pa	12
4	Average efficiency	%	77,6
5	Seasonal space heating efficiency	%	68
6	Energy efficiency index	—	103
7	Consumption of electrical energy	kW/h	0
8	Continuous (CON) or intermittent (INT) operation		INT
9	Average flue gas temperature	°C	252
10	Wood consuption	kg/h	2,1
11	Consumption of combustion air	m ³ /h	19,5
12	Standing air loss	m ³ /h	1,8
13	Mass of the appliance	kg	215
14	CO ₂	%	NPD
15	Flue gas mass flow	g/s	7,2
16	CO emission at 13 Vol % O ₂	mg/m ³	1226
17	NO _X emission at 13 Vol % O ₂	mg/m ³	131
18	OGC emission at 13 Vol % O ₂	mg/m ³	111
19	Dust emission at 13 Vol % O ₂	mg/m ³	32
20	Minimum building space	length	mm 1140
		width	mm 620
		height	mm 1170
21	Chimney designation		T400
22	Connection to a common chimney		no
23	Maximum load of a chimney the appliance may carry	kg	130
24	Three-component insulated chimney - active height 5,5 m	Ø mm	180
25	Character of building construction with fireplace insert	warm air convection	yes
		heat storage without conv	yes
26	Convection hot air flow (min. clean cross-section input)	cm ²	200
27	Convection hot air flow (min. clean cross-section output)	cm ²	325

FIREPLACE INSERT KAZETA 78


78 series

Model: **L LD**

Typ accorcing to the EN16510-1:2023:

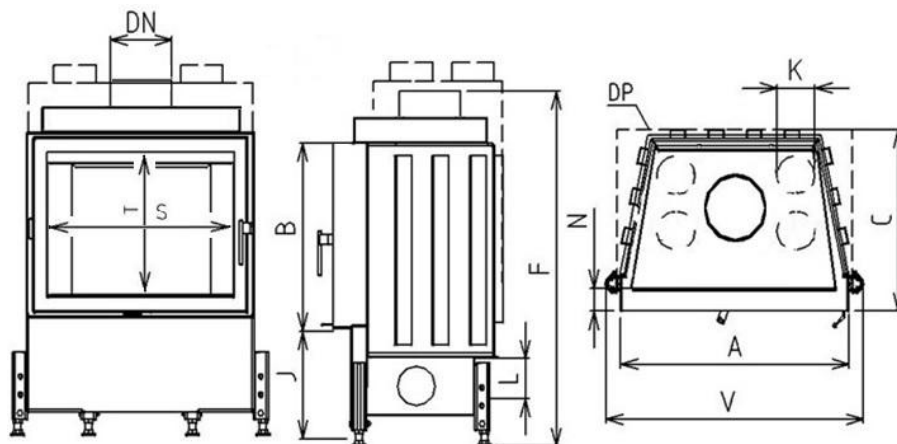CM
A


Sizes			KAZETA 78 L LD 780/450	KAZETA 78 L LD 780/510
1	A	mm	780	
2	F	mm	960	1020
3	C	mm	470	
4	DN	Ø mm	200	
5	B	mm	450	510
6	V	mm	890	
7	R	mm		
8	FF	mm		
9	H	mm		
10	J	mm	325+(160)	
11	K	Ø mm	4x125	
12	L	Ø mm	125	
13	M	mm		
14	N	mm	50	
15	S	mm	650	
16	T	mm	320	380
17	U	mm		

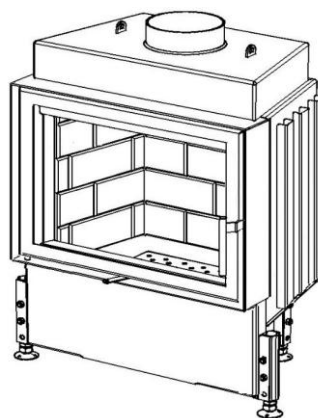
Basic design :

External air inlet (EPV)
 Segment chamotte lining (SO)
 Glass classic
 Desing inox/black RP2,RP1,R, strips SM
 Coated with ecological paint

Optional accessories:


Cover frame (KR)
 Black segment chamotte lining (SOČ)
 Glass Reflex (SR)
 Glass modern (SM)
 External ashtray (VOP)
 Convectional casing (DP)
 Lower hearth (ZO)
 Rear feeding door (PD)
 Vertical heat-storing panel (AZ)
 Heat accumulation quadrant (APO)

Test Method: EN16510-1 ed. 2.2023

The roomheater complies with the requirements: EN 16510-2-2:2022, DIN +, BlmSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185 Ecodesig

The minimum distances from the combustible materials:

A

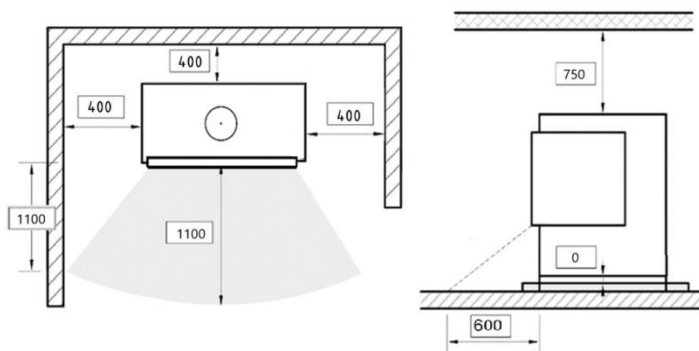

Minimum distances to non-combustible walls	100 mm
Thickness of protective insulation	50 mm
Protective insulation material	calcium silicate

Technical parameters			
1	Nominal heat output	kW	7
2	Heat flow into the space	kW	7
3	Pressure required	Pa	12
4	Average efficiency	%	77,8
5	Seasonal space heating efficiency	%	68
6	Energy efficiency index	—	103
7	Consumption of electrical energy	kW/h	0
8	Continuous (CON) or intermittent (INT) operation		INT
9	Average flue gas temperature	°C	273
10	Wood consuption	kg/h	2,2
11	Consumption of combustion air	m ³ /h	21
12	Standing air loss	m ³ /h	1,8
13	Mass of the appliance	kg	230
14	CO ₂	%	NPD
15	Flue gas mass flow	g/s	7,6
16	CO emission at 13 Vol % O ₂	mg/m ³	1226
17	NOX emission at 13 Vol % O ₂	mg/m ³	109
18	OGC emission at 13 Vol % O ₂	mg/m ³	111
19	Dust emission at 13 Vol % O ₂	mg/m ³	32
20	Minimum building space	length	mm 1190
		width	mm 620
		height	mm 1170
21	Chimney designation		T400
22	Connection to a common chimney		no
23	Maximum load of a chimney the appliance may carry	kg	130
24	Three-component insulated chimney - active height 5 m	Ø mm	200
25	Character of building construction with fireplace insert	warm air convection	yes
		heat storage without conv	yes
26	Convection hot air flow (min. clean cross-section input)	cm ²	225
27	Convection hot air flow (min. clean cross-section output)	cm ²	350

